



10
YEAR GUARANTEE

10 year guarantee
against manufacturing
defects 10 year
guarantee on glass



JELD-WEN
WINDOWS & DOORS

JELD-WEN UK LTD
Snow Hill, Melton Mowbray,
Leicester, LE13 1PD

T. 0845 122 2890
F. 01664 503 403
E. marketing@jeld-wen.co.uk
www.jeld-wen.co.uk

SSAMFD/WD609/11.09



JELD-WEN
WINDOWS & DOORS

The Wellington

Sliding, folding patio door



RELIABILITY for real life®

making the most of those warm summer nights



Building on the popularity of the Canberra range, we have introduced the Wellington sliding folding door, constructed from FSC 44mm engineered softwood or 44mm solid FSC hardwood factory glazed with Low E, argon filled, 16mm gas filled units.

This construction brings superior thermal performance to aid in meeting the requirements of Approved Document L, as well as improved structural stability.

tri-fold door operation



The Wellington sliding folding door range is now available in an extended variety of widths with fully reversible doors, enabling you to hang from left to right or right to left.

Overall height 2100mm with widths of:

Hi-Build white:

1800mm, 2100mm, 2400mm, 3000mm, 3600mm and 4200mm.

Unfinished hardwood:


1800mm, 2100mm and 2400mm.

The sliding doors open up fully allowing maximum light and the outdoors come part of your indoor space.

The brushed stainless steel hardware provides effortless finger tip smooth sliding operation and the locking bolts on the panel enable the Wellington doorset to be used as a single door leaf.

Supplied pre-machined for assembly in a frame pack, hardware pack and door leaf pack. Factory pre-finished in white gives improved protection on site, saving time and decoration costs.

- FCS chain of Custody Certified timber
- Tri-fold operation, folding outwards
- Fully reversible 44mm engineered doors
- Factory glazed 16mm Low E Argon filled insulating glass units
- Trickle ventilation in frame head
- Brushed stainless steel fittings
- Silver effect handle
- Weather-stripped frame
- Multi-point locking
- Softwood fully finished in white
- Hardwood unfinished
- Whole product U value 1.9w/m²K

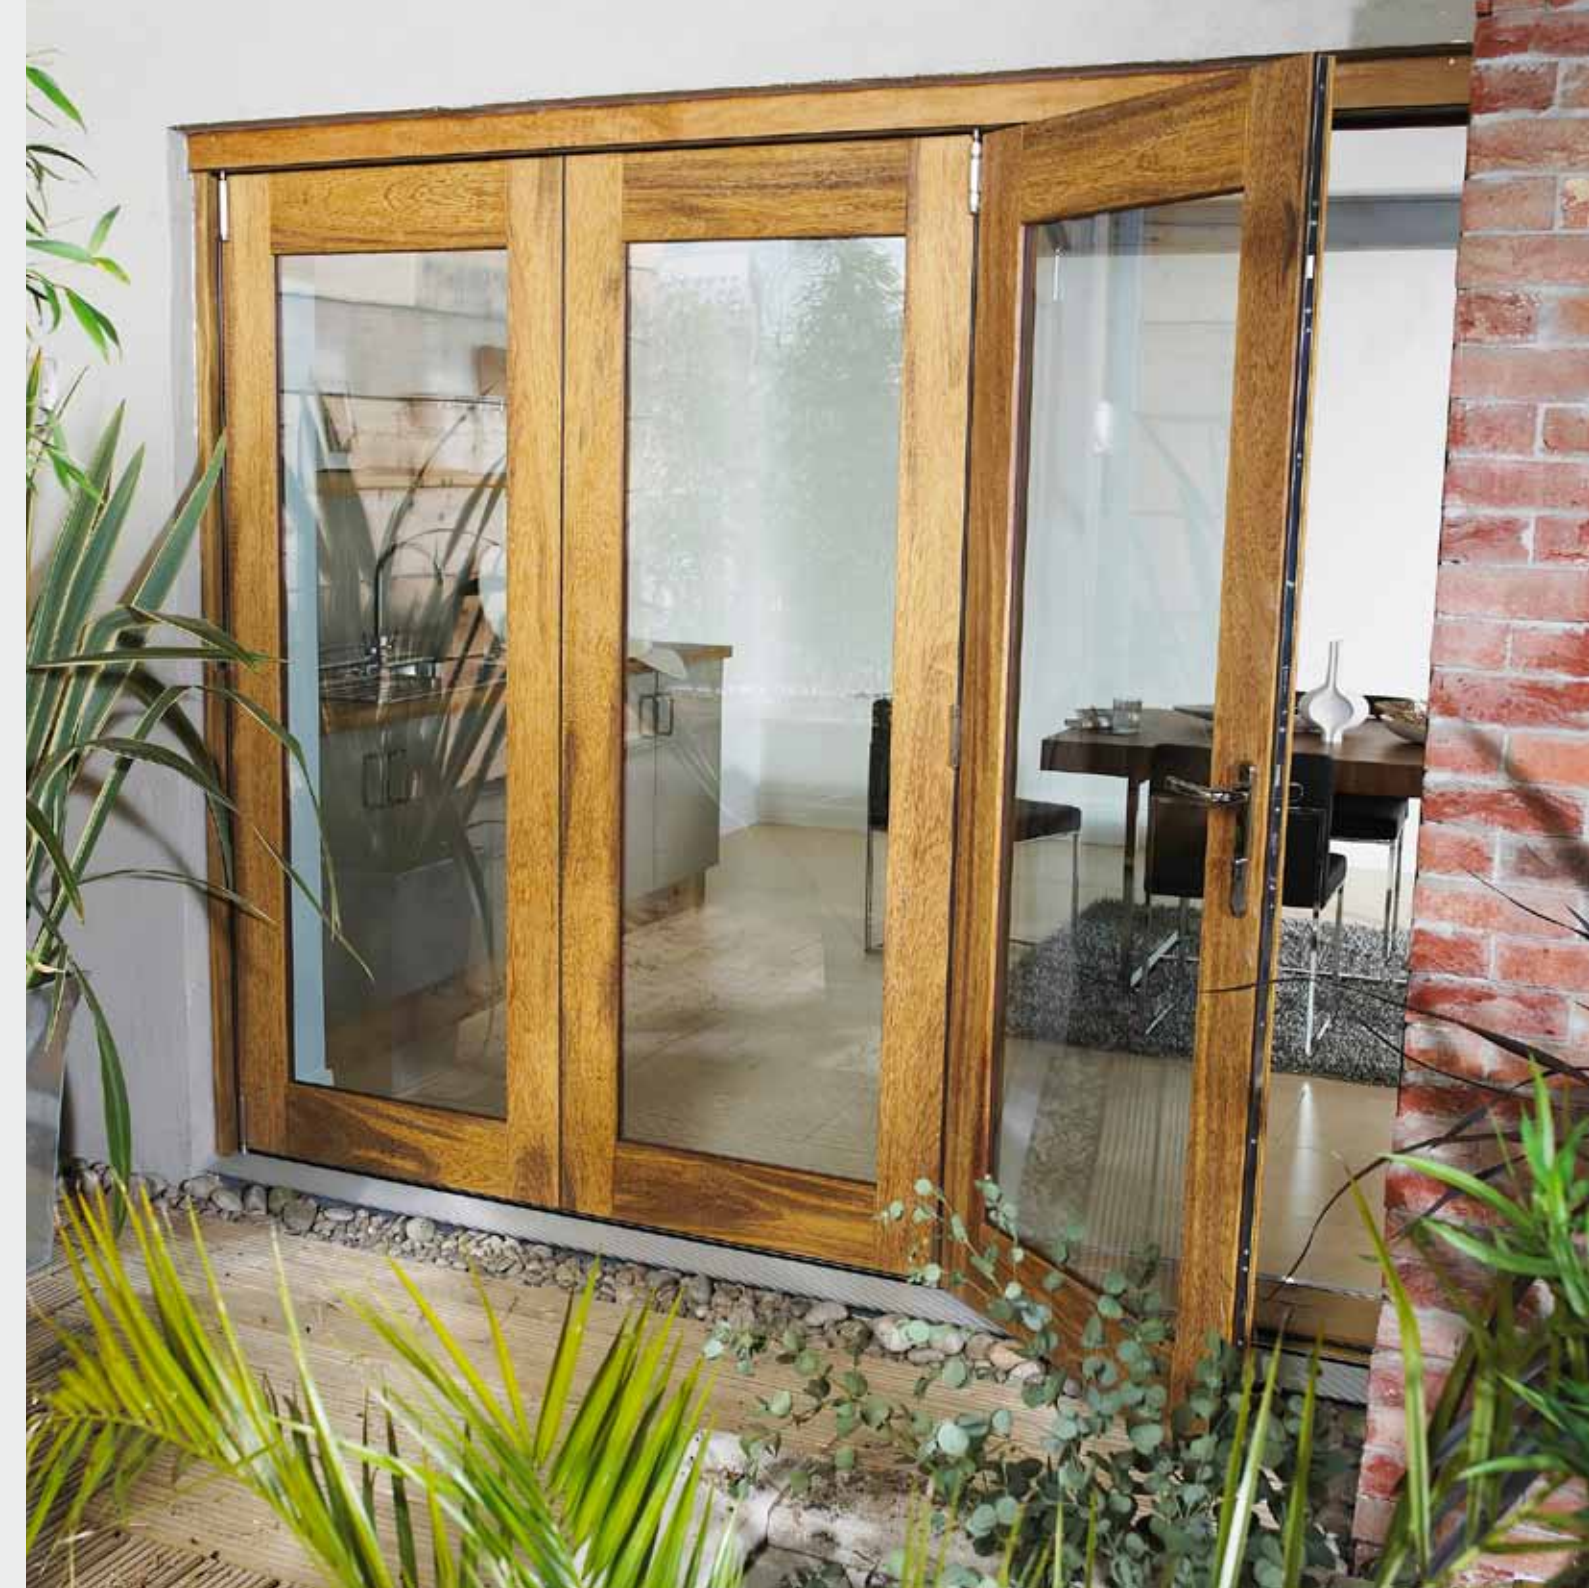

hardwood unfinished

code	configuration	brickwork opening	frame size
WELL18HU	3L or 3R	W:1805 x H: 2105mm	W:1795 x H: 2095mm
WELL21HU	3L or 3R	W:2105 x H: 2105mm	W:2095 x H: 2095mm
WELL24HU	3L or 3R	W:2405 x H: 2105mm	W:2395 x H: 2095mm

softwood factory finished white

code	configuration	brickwork opening	frame size
WELL18SW	3L or 3R	W:1805 x H: 2105mm	W:1795 x H: 2095mm
WELL21SW	3L or 3R	W:2105 x H: 2105mm	W:2095 x H: 2095mm
WELL24SW	3L or 3R	W:2405 x H: 2105mm	W:2395 x H: 2095mm
WELL30SW	3+1 or L or R	W:3005 x H: 2105mm	W:2995 x H: 2095mm
WELL36SW	5L or 5R	W:3605 x H: 2105mm	W:3595 x H: 2095mm
WELL42SW	5+1 or L or R	W:4205 x H: 2105mm	W:4195 x H: 2095mm

door configurations

